

Turnigy TGY-i10 Transmitter Firmware Update

This update is only good for the TGY-i10 transmitter. Don't try to install it on any other transmitter.

The update for the TGY-i10 transmitter will be found here:

<http://www.hobbyking.com/hobbyking/store/uploads/443508095X1465900X9.zip>

Download the ZIP-file onto your computer and extract it. You will find the ".exe" file in the extracted folder

Before you start the update, please copy all your model settings onto a SD-card.

For your safety! Do not switch on any of your model's receiver.

Please read and understand this manual carefully before you start the firmware update.

How to:

- For updating the Turnigy TGY-i10 transmitter, please switch on your transmitter only.
- Choose the menu [System] and go to submenu [Firmware update].
- A request will pop up and ask you if you would like to proceed. Please press [Yes].
- Connect the transmitter to your computer, using the USB cable.
- Start the update (Turnigy TGY-i10 firmware 1.0.7.0 exe)

Warning! Please do not remove your USB cable at this time while updating the firmware. Otherwise the radio will completely crash and you will not be able to recover whatsoever. Please take note!


- Wait until the update has finished.
- Unplug the USB cable. Remove the battery from your transmitter then reinstall it, switch on your transmitter again.
- Copy the backed-up model settings from the SD Card into the TX.
- Calibrate the screen again.

Please, also update your receivers, to get compatibility to the new functions.

- You need to re-bind your receivers to your firmware updated Tx. Please make sure that the models on your transmitter correspond to each model set up when rebinding.
- Choose menu [RX setup] and choose submenu [Update receiver].
- A request will pop up and ask for confirmation. If you are sure, press [YES].
- Now the transmitter is waiting for the receiver.
- Power on your receiver. Press the update button on your TGY-i10 or TGY-iA6B V2 receiver. (Please see pictures here in the document).
- Wait until the update is finished.
- Repeat this for any receiver you have, including any newly purchased receiver.

This update process is only for TGY-i10 and TGY-iA6B V2 receiver

Turnigy TGY-i10

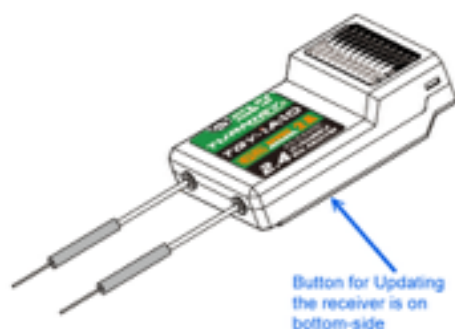

TGY-iA6B V2 receiver



After the update, you will find some new functions.

- Button for resetting the engine timer on the main-screen

- Menu [System] New function for switching on or off of the alarm sound. So the alarm sound can be set individually without affecting the system sound.
- Menu [RX Setup] you will be able to set the ASL pressure.
- Menu [RX Setup] – [Receiver PPM Output] is now working on your receiver channel #1.

Hope this Turnigy TGY-i10 firmware update instruction will guide you through clearly and successfully.

This Turnigy i10 firmware update procedure instruction is provided by Mr. Evil Pusher.