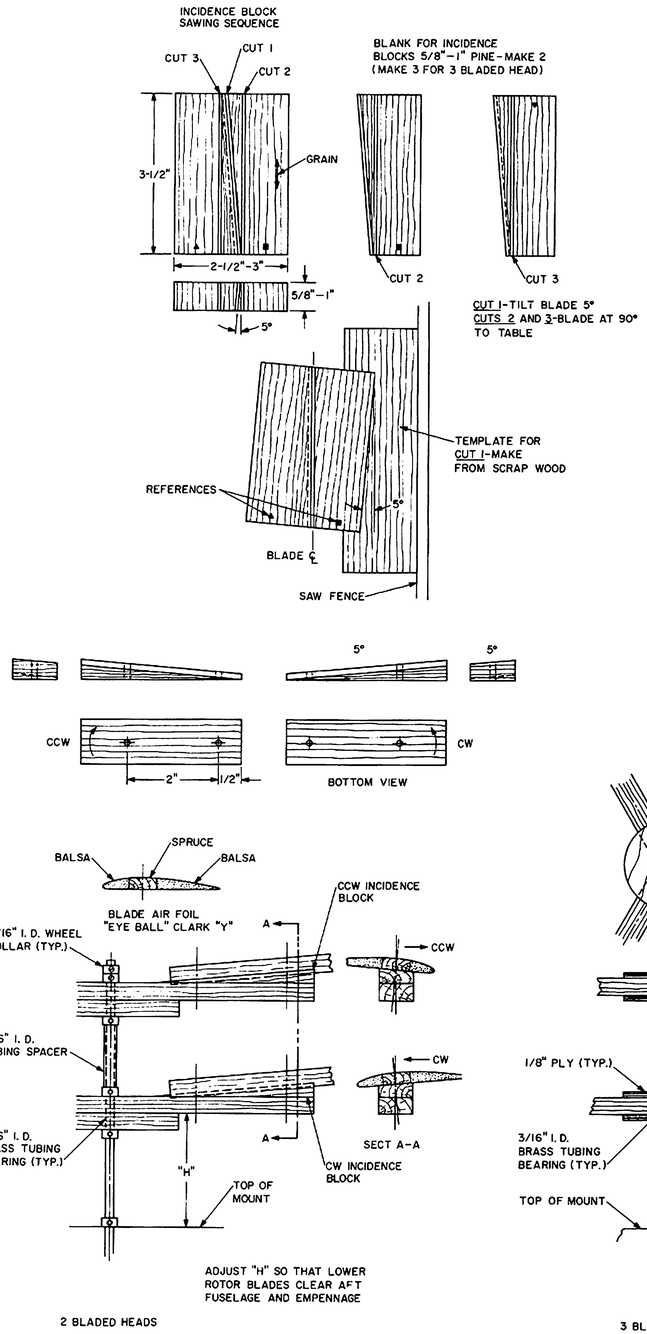


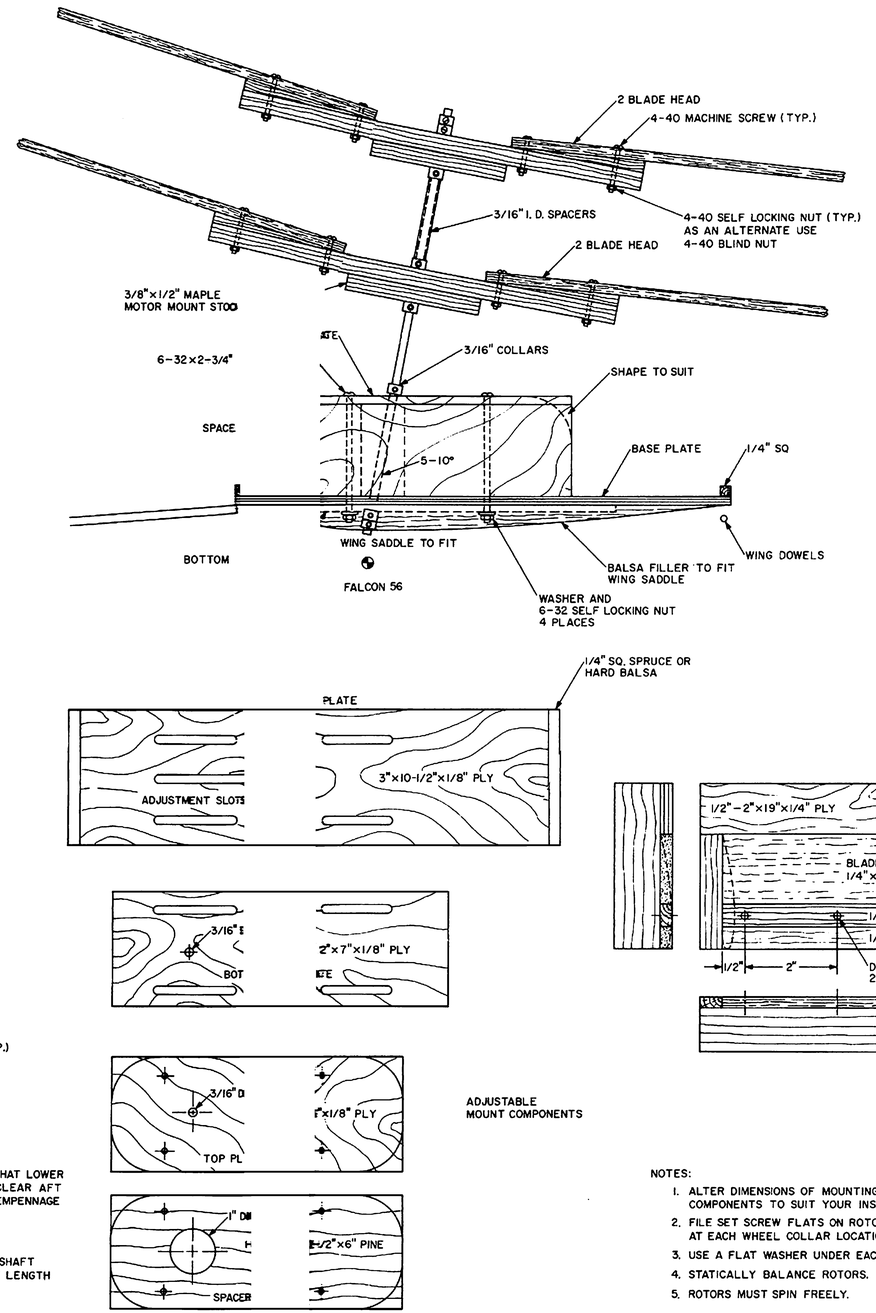


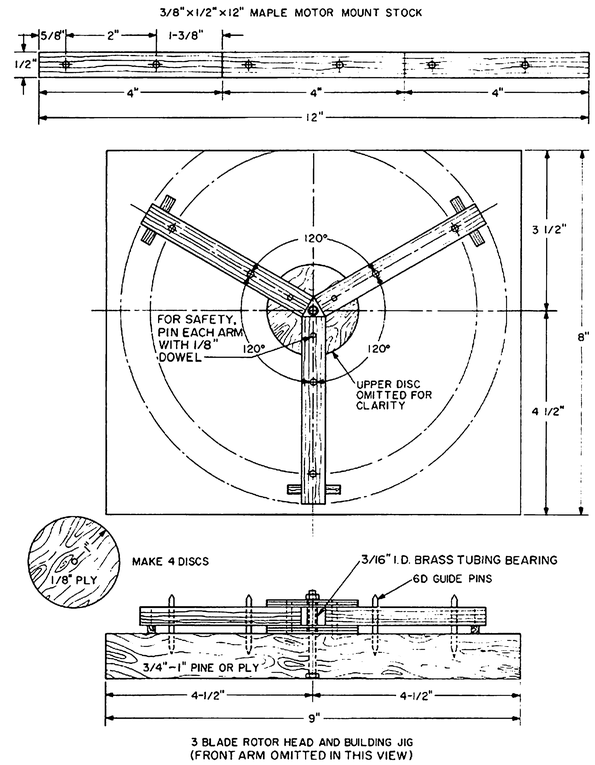


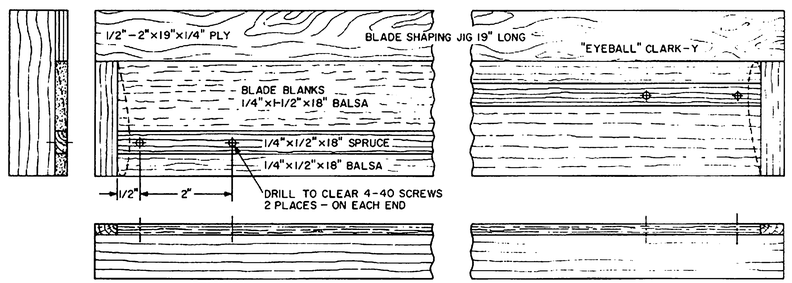


NOTES:

1. ALTER DIMENSIONS OF MOUNTING ASSEMBLY AND COMPONENTS TO SUIT YOUR INSTALLATION.
2. FILE SET SCREW FLATS ON ROTOR SHAFT AT EACH WHEEL COLLAR LOCATION.
3. USE A FLAT WASHER UNDER EACH SCREW HEAD AND NUT.
4. STATICALLY BALANCE ROTORS.
5. ROTORS MUST SPIN FREELY.

0.35-0.45 POWERED SPORT AUTOGYRO
2 OR 3 BLADED DUAL ROTORS
37"-38" DIAMETER ROTOR DISC

© RCM ALL COMMERCIAL RIGHTS RESERVED

# GYROFALCON

| DESIGNED BY / DRAWN BY | Wm. L. LEHN | INKED BY | IMPERIAL |
|---|---|---|---|

0 1 2 3 4 5 6

H.E

PLAN NO. 1001