


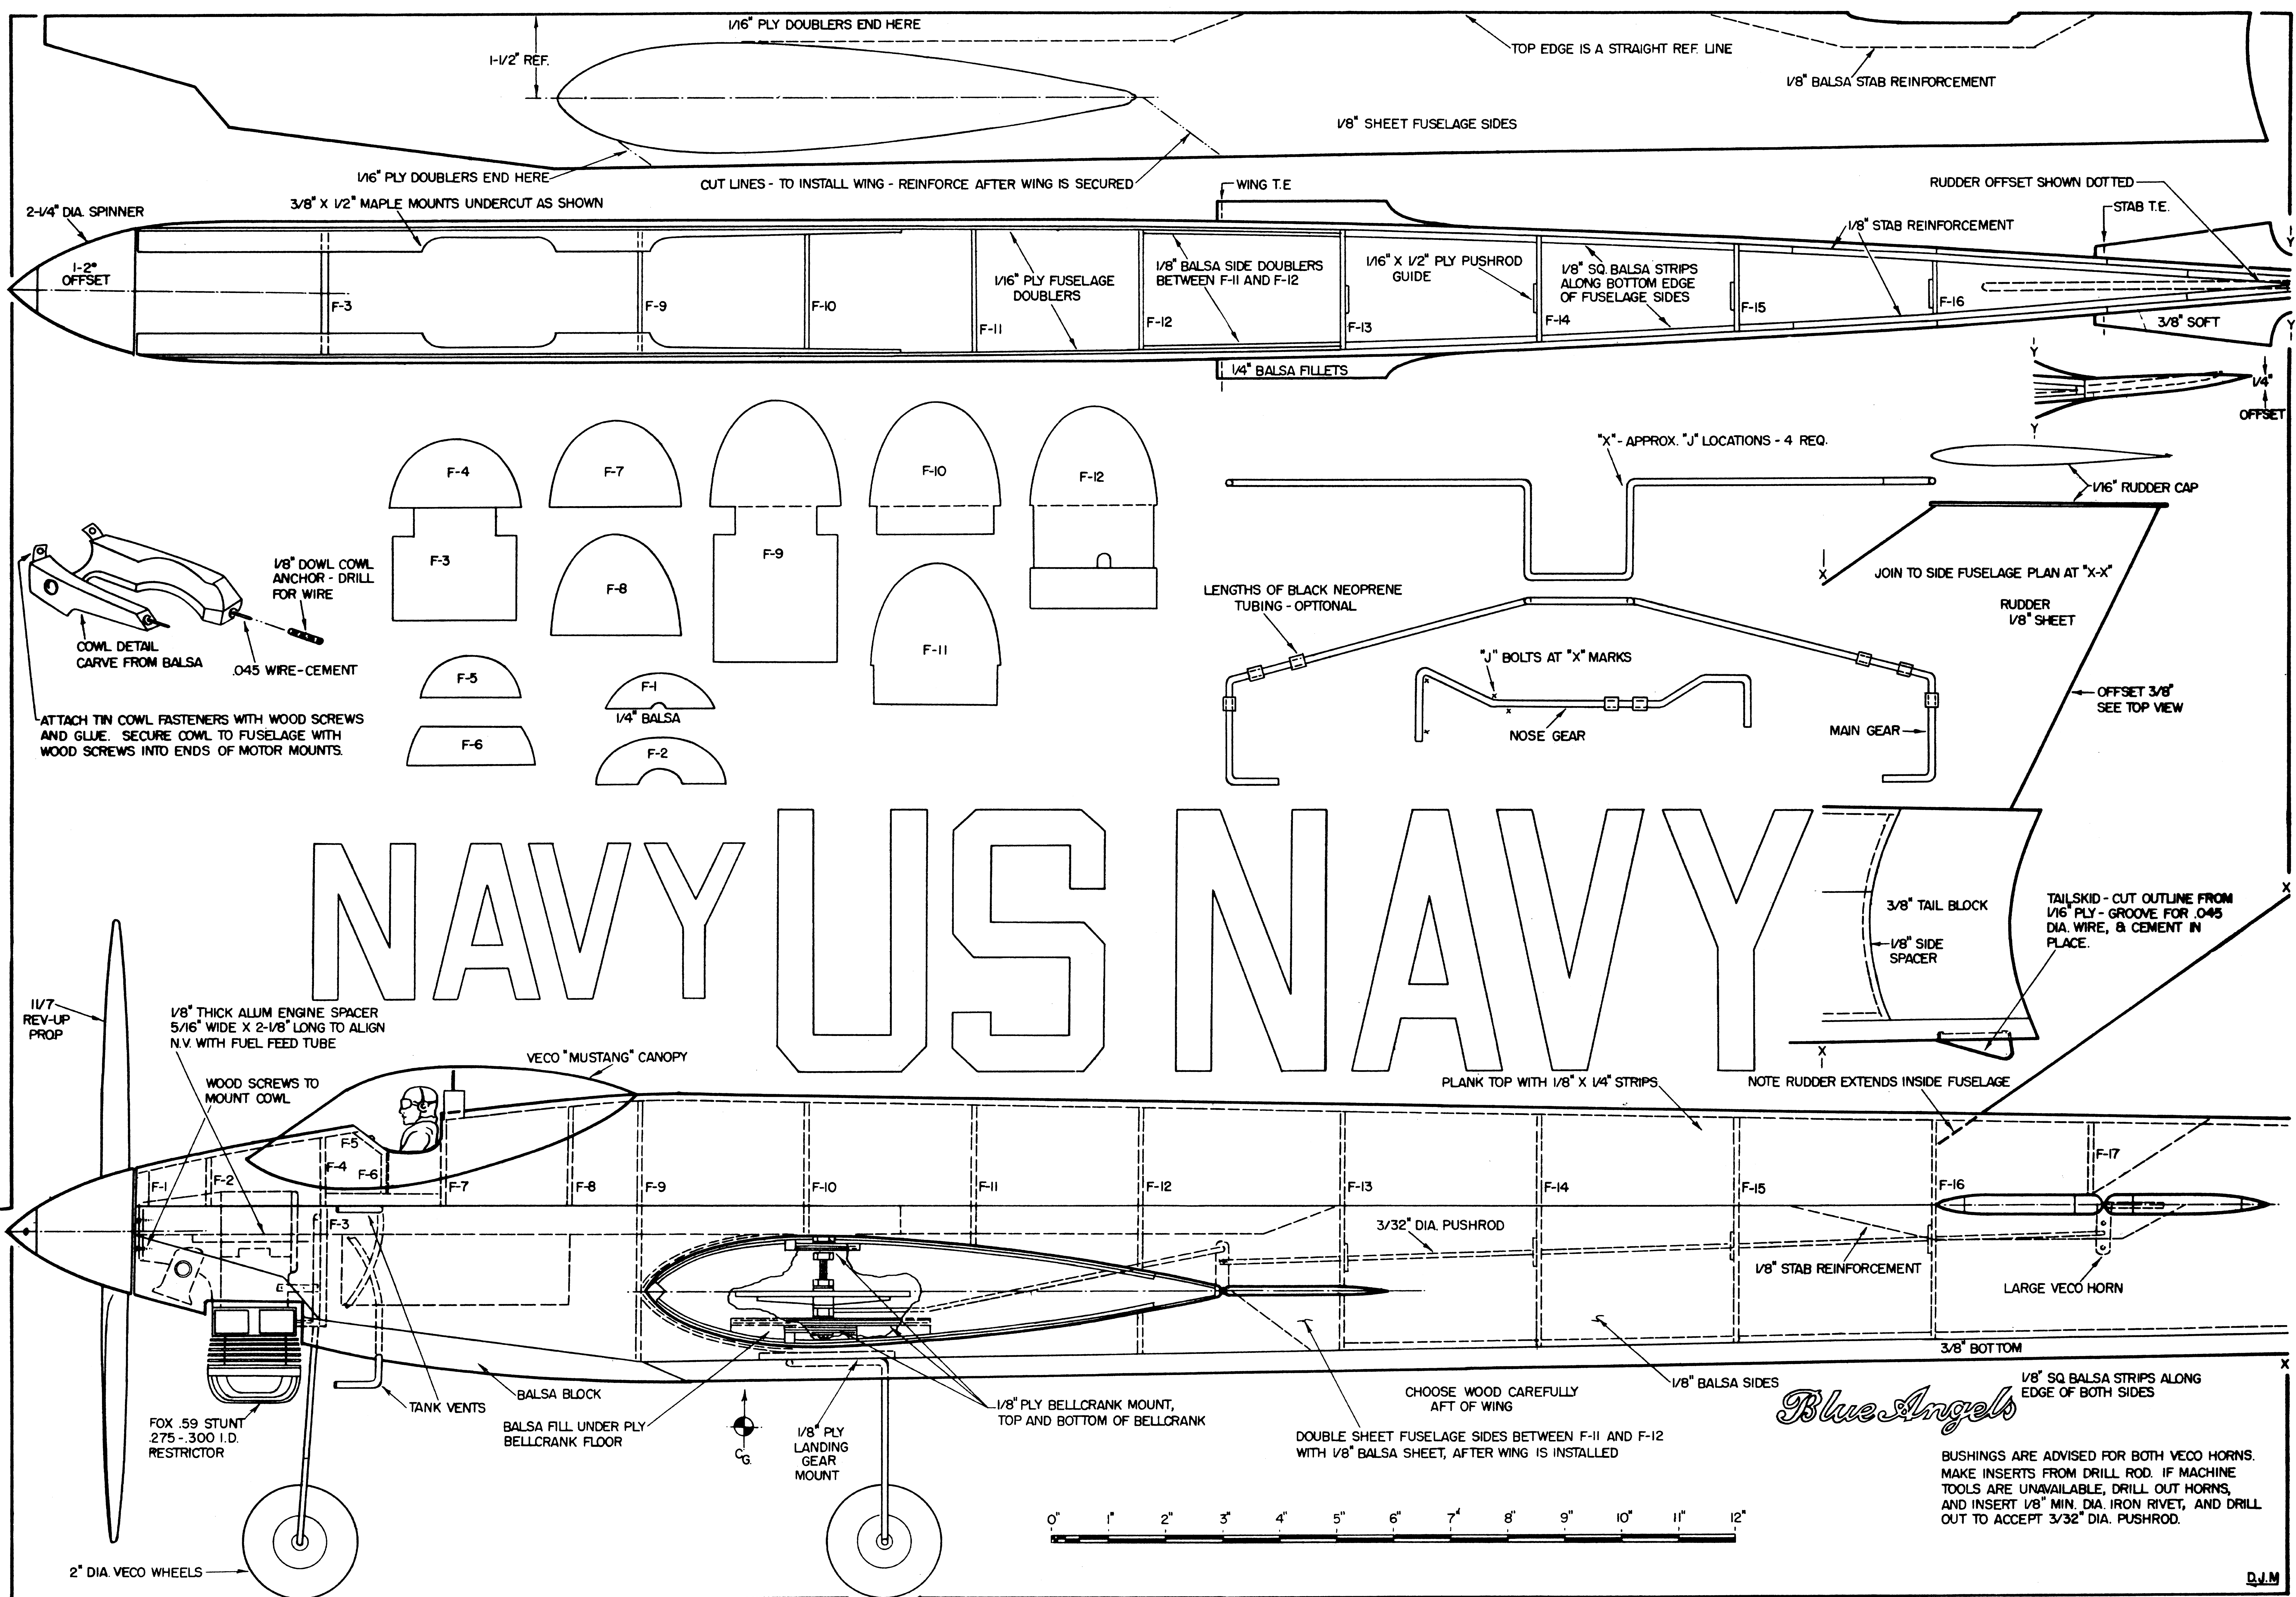
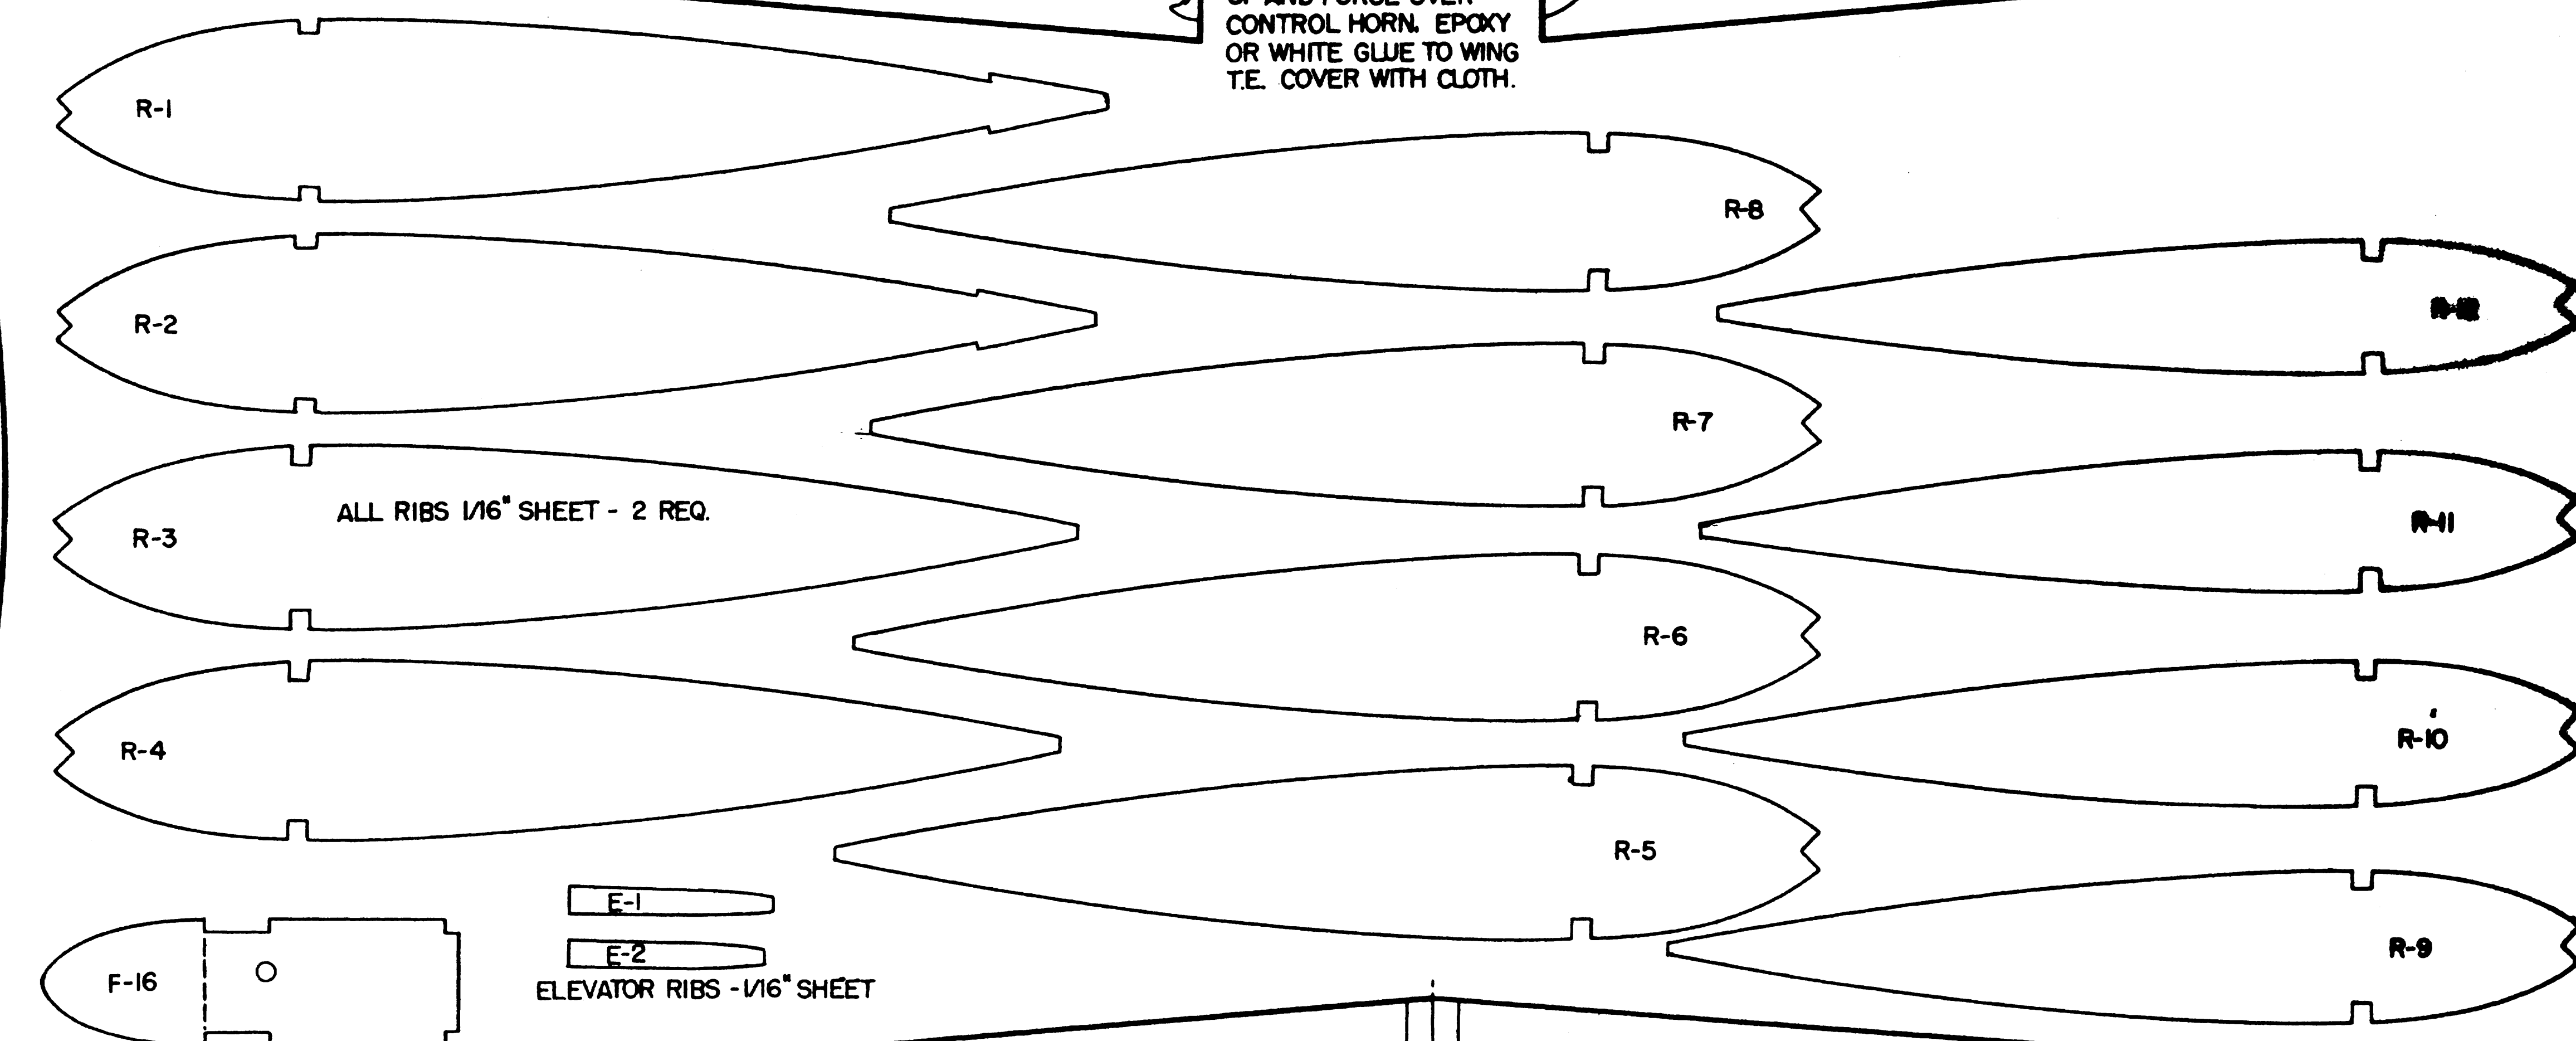
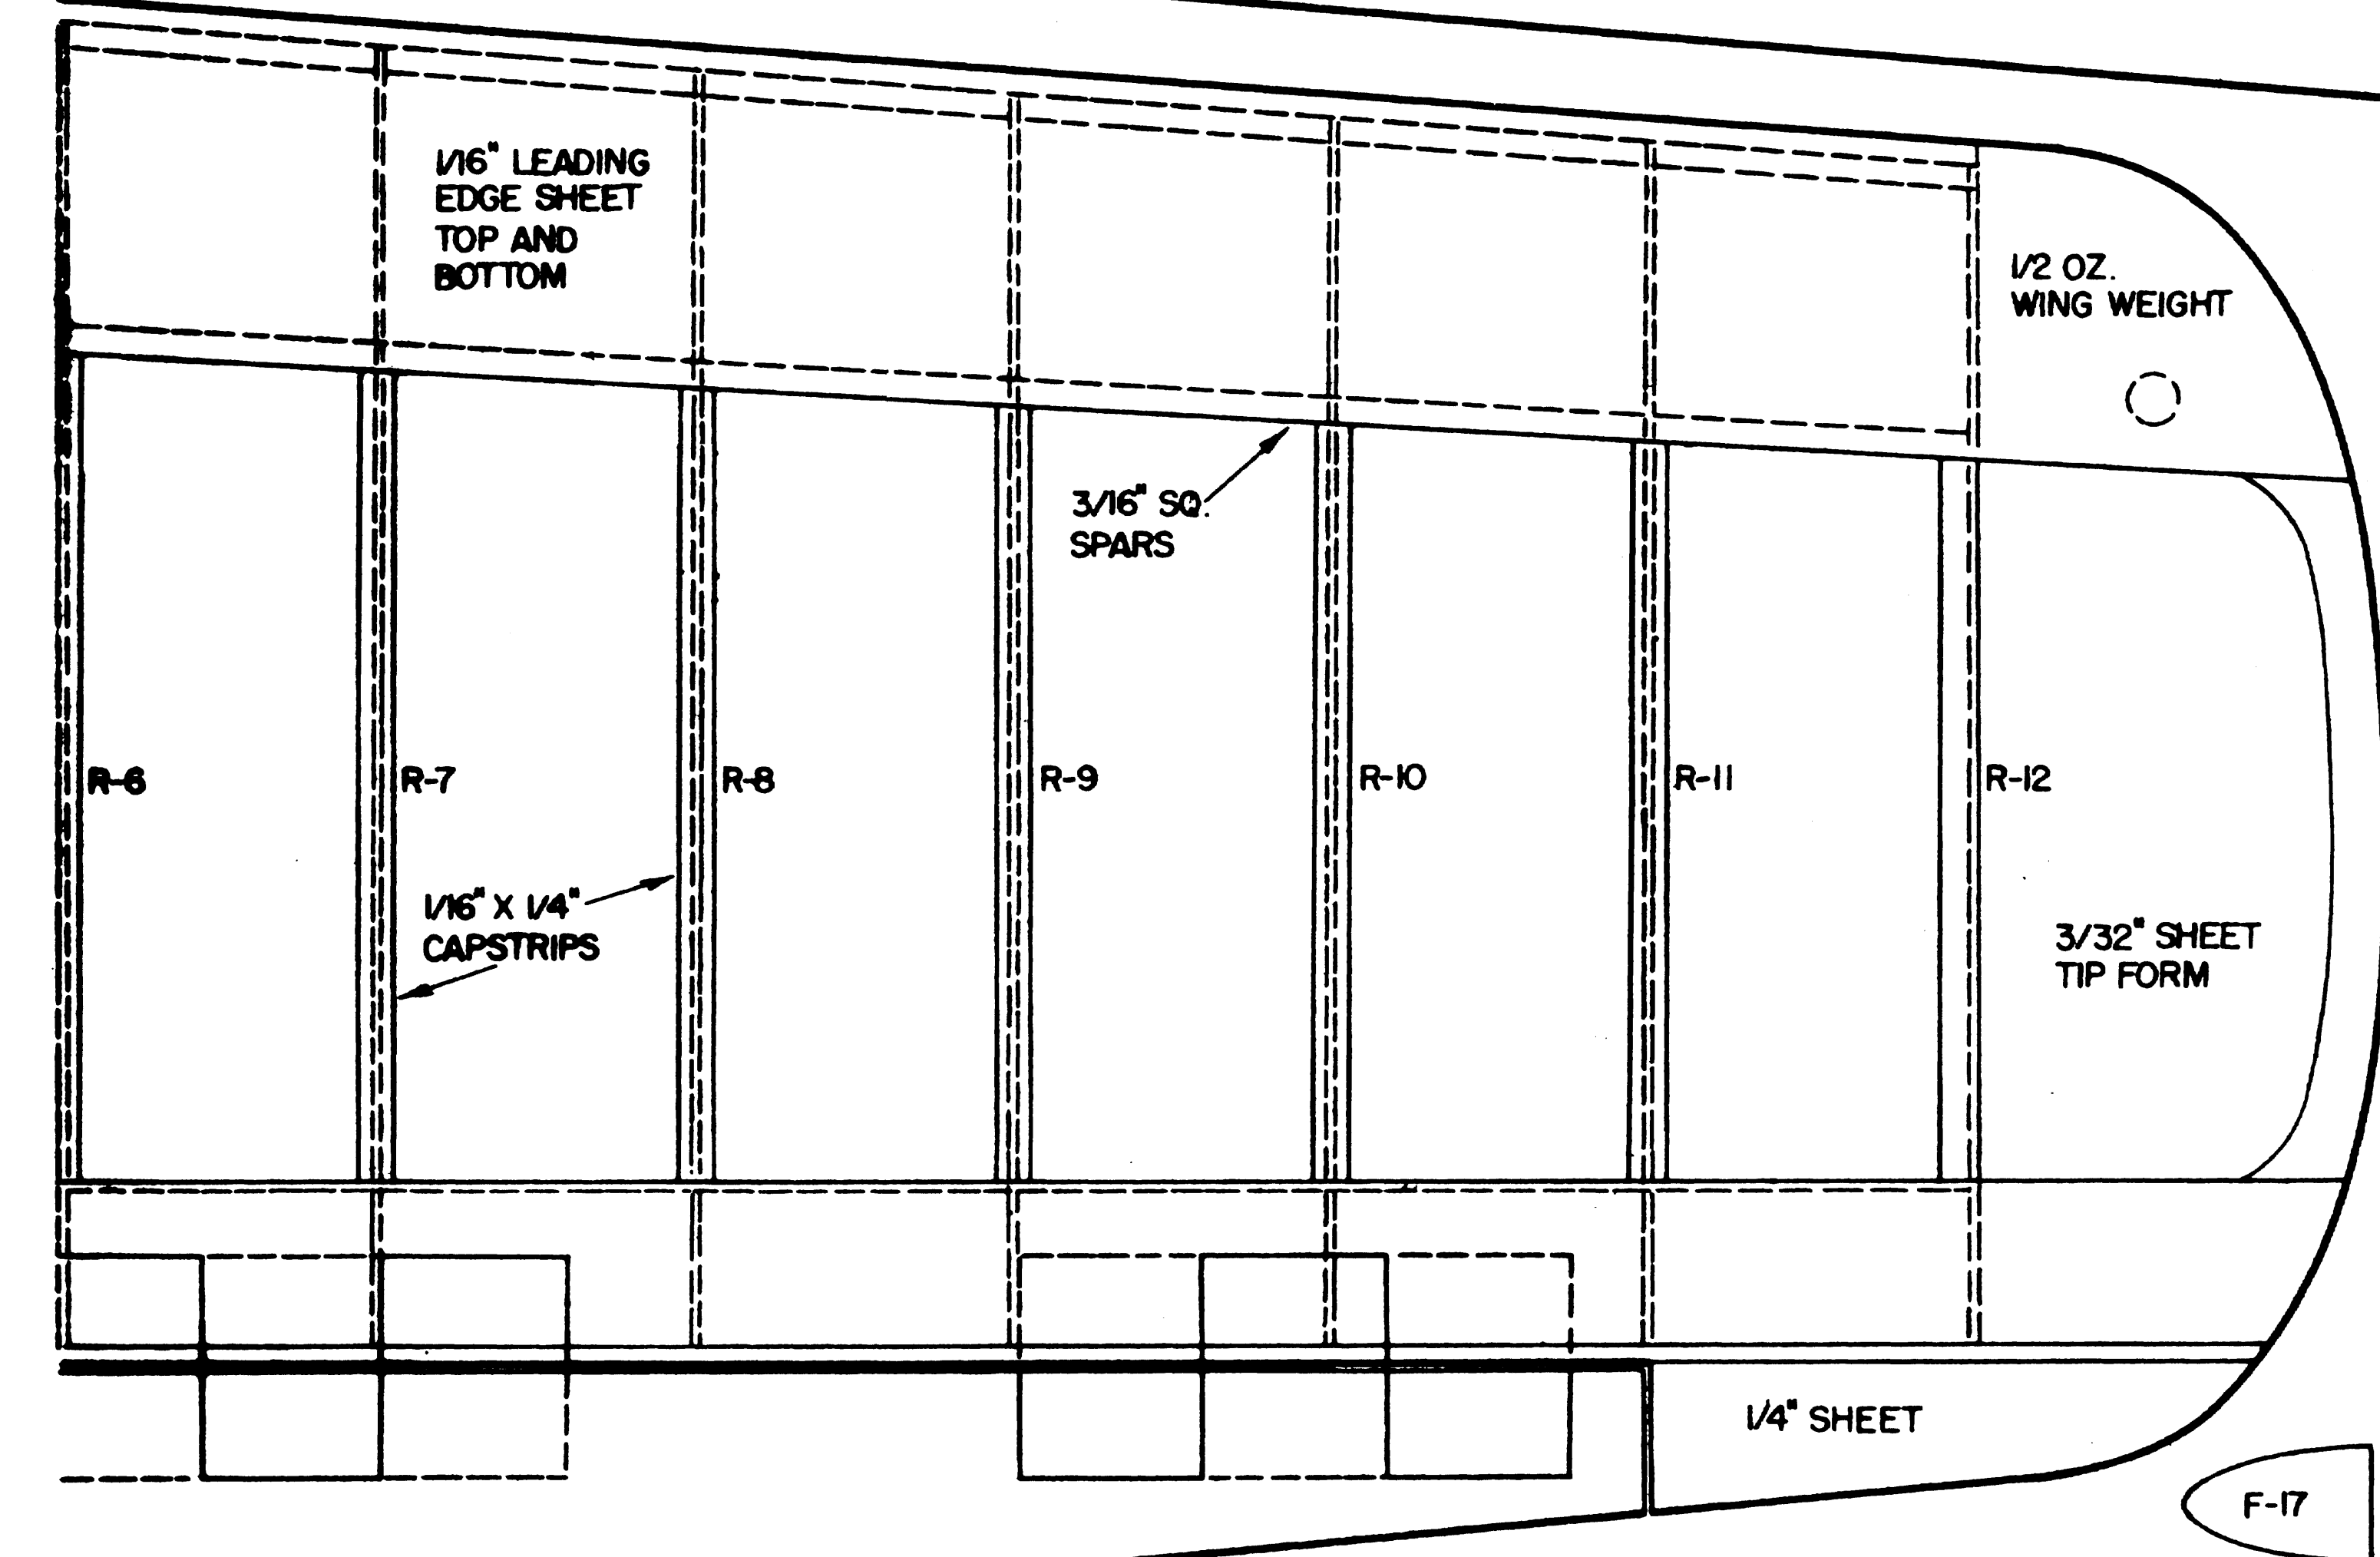
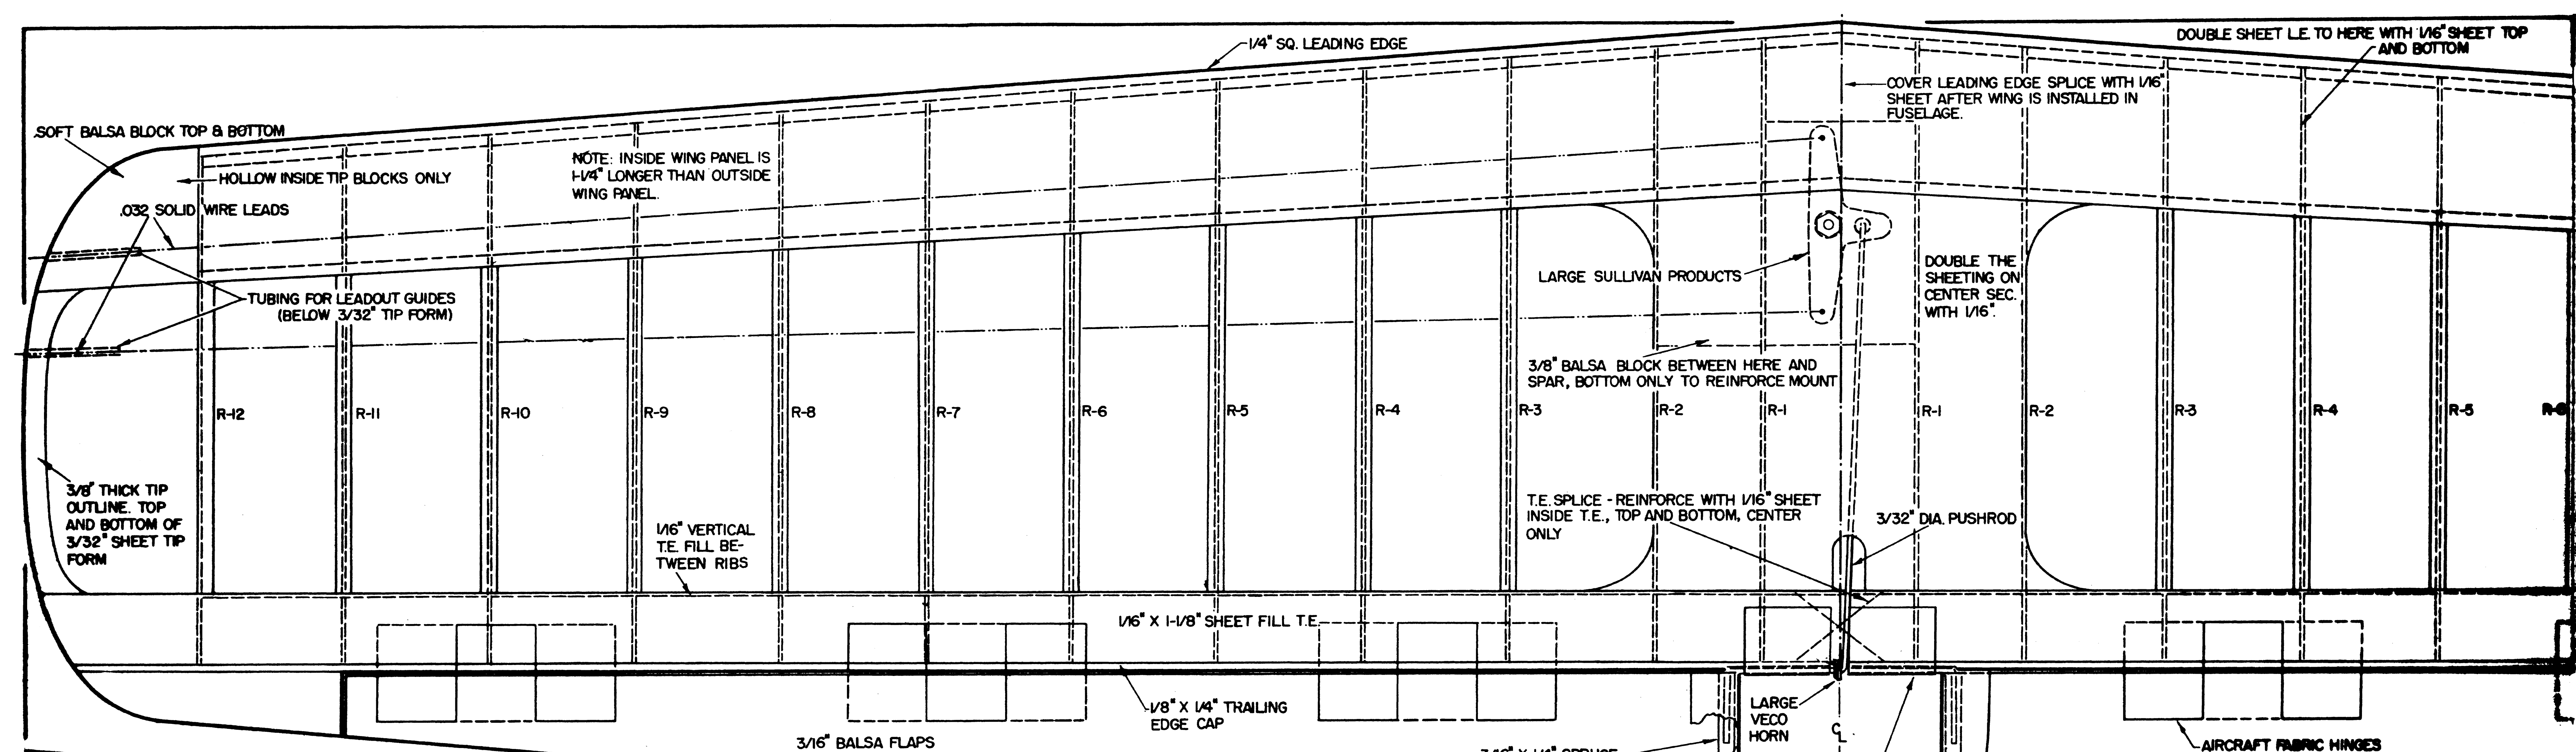
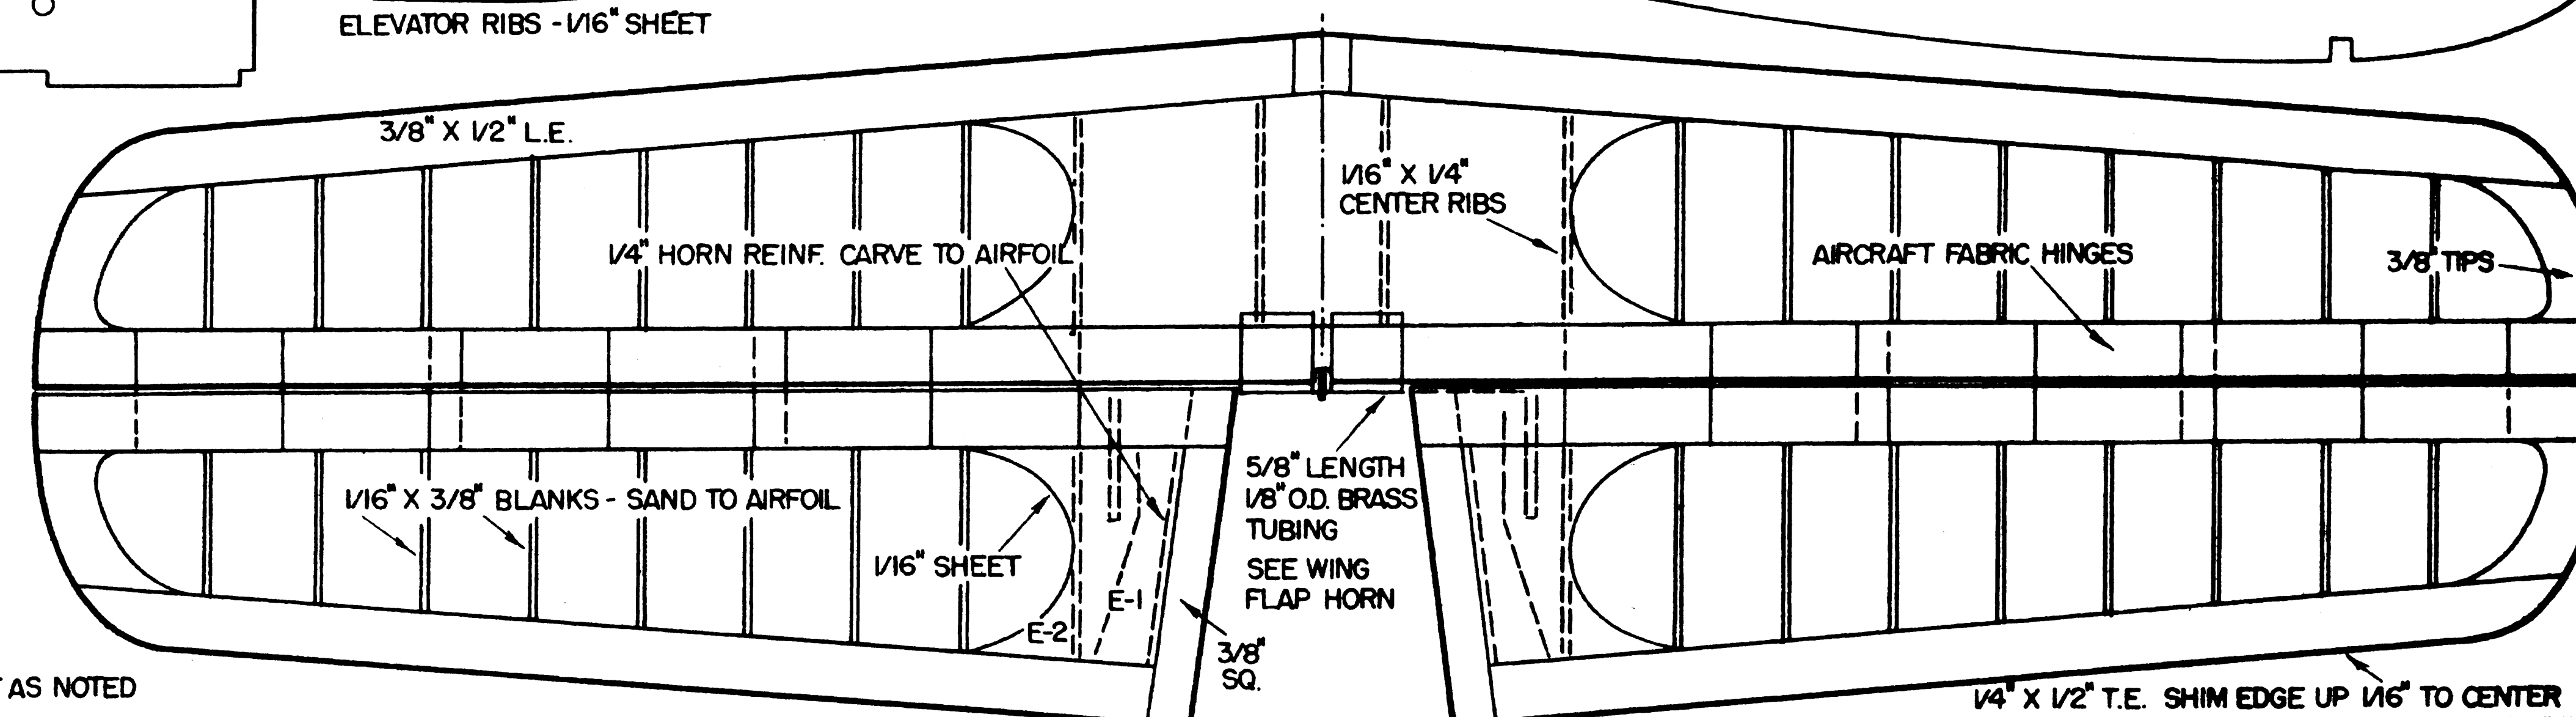


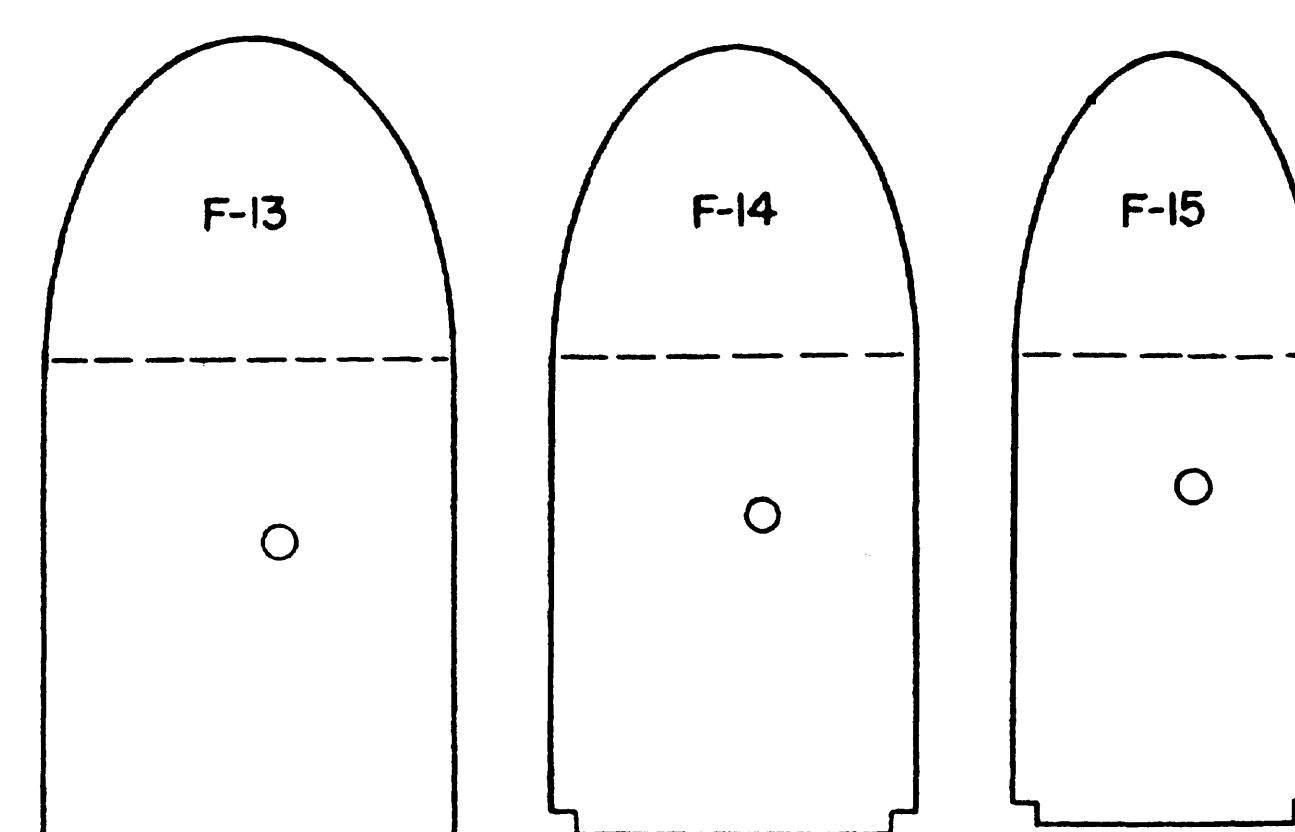

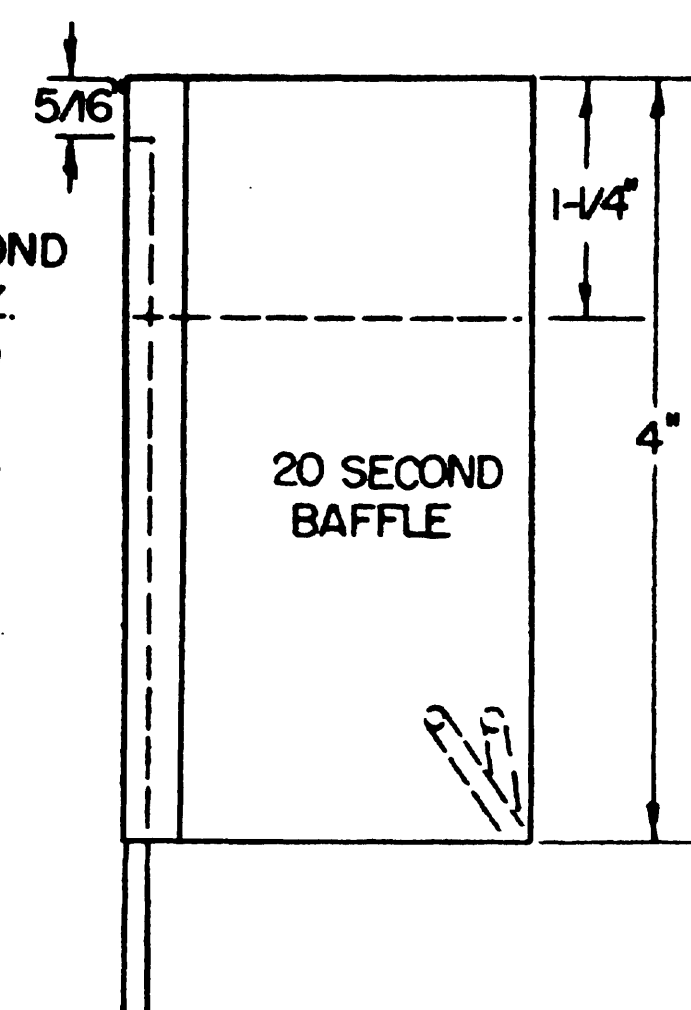

GAS TANK DETAIL - MAKE FROM .007 SHEET TIN. VENTS AND FUEL FEED TUBING OF 1/8" O.D. BRASS. A "20 SECOND BAFFLE" IS USED. 20 SECONDS OF TIME TO DRIP 5-1/2 OZ. OF WATER BETWEEN BAFFLE AND FUEL PICK UP LINE, TO BE USED AS A REFERENCE IN FITTING BAFFLE. ADJUST BY BENDING WITH SCREWDRIVER BETWEEN TANK WALLS AND BAFFLE. TANK CAPACITY - 5-1/2 OUNCES.

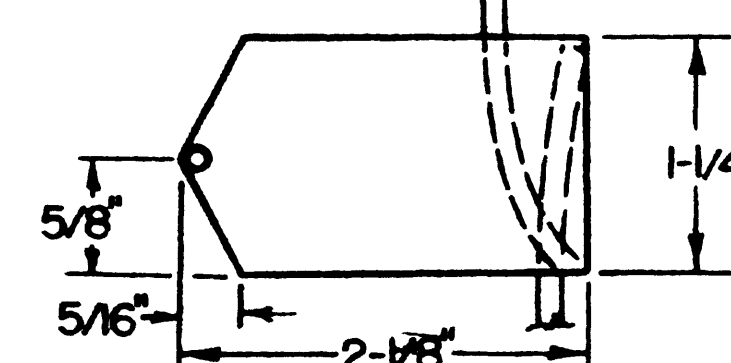

ALL FUSELAGE FORMERS - 3/32" SHEET EXCEPT AS NOTED